
PRADOTEC
Innovation for Tomorrow

Quick Guide
BCR200BT Biometric Card Reader

© Copyright 2012 PRADOTEC CORPORATION SDN. BHD. All Rights Reserved.

Overview

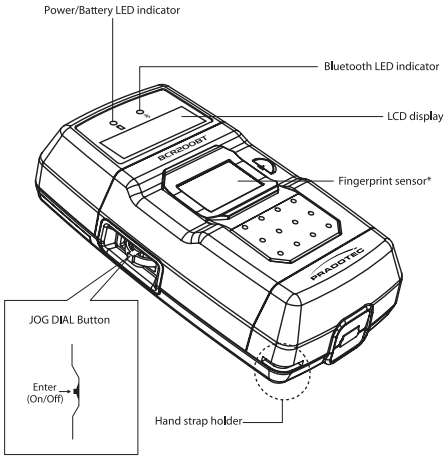

*The fingerprint sensor should be cleaned regularly for optimum performance.

Pairing the Device

1. Place the BCR200BT and the host not more than 1 meter apart.

2. Press and hold the JOG DIAL button for 2 seconds to turn on BCR200BT.

3. Continue to hold the Power Button for additional 3 seconds.
- The Blue & Red LED will blink alternately indicating that it has entered pairing mode.

4. Now the device will be waiting for the host to initiate pairing.

5. Once initiated, key in passkey "1234" to establish the pairing.
- Blue LED will blink indicating that it has successfully connected to the host.


LCD Messages

The BCR200BT is equipped with 32 X 128 graphical display with LED backlight to display the device status during operation. The following illustration provides the messages displayed on the device LCD.



	What you see	Description
Mode	Mobile Mode	Device in mobile operation mode
Status	Ready	Device ready for use
	Error!	Error encountered
	Bio Enable	Biometric successfully turns on
	Bio Fail	Biometric fails to turn on
	Match	Device successfully verifies fingerprint
	Not Match	Device fails to verify fingerprint
	Enroll OK	Device successfully enrolls fingerprint
	Enroll Fail	Device fails to enroll fingerprint
	Insert Card	Ready to insert card

Inserting SAM card

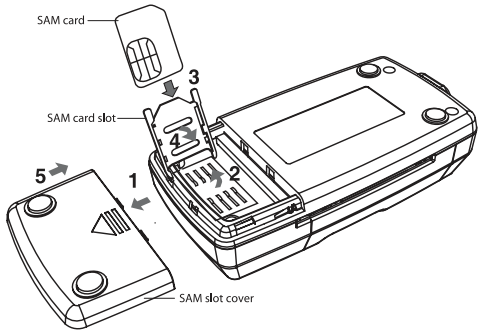

Perform steps 1 to 5 to insert the SAM card as shown above.

*Power off the unit before inserting the SAM card

LED indicator


Bluetooth LED indicator	Status
Blue LED is lighted up for 1 second	Unit is turned on
Blue LED is blinking 5 times consecutively	Unit is turned off
Blue LED is blinking every 1 second	Unit in connecting mode
Blue LED is blinking every 3 seconds	Unit is connected to host successfully
Blue & Red LED is blinking alternately	Unit in discoverable mode
Battery LED indicator	**Status**
Blinking every 1 second	Battery low (0% ~ 20% battery capacity)
Blinking every 1.5 seconds	Charging battery
Lights remained lit	Fully charged

Turning On/Off / Reset the unit


1. Press and hold the JOG DIAL button for 2 seconds to turn on BCR200BT.
   - The bluetooth LED indicator will light for 1 second.

2. Press and hold the JOG DIAL button for 5 seconds to turn off BCR200BT.
   - The bluetooth LED indicator will blink 5 times consecutively before the unit is turned off.

3. Press and hold when the reader fails to respond, press the reset button to be discovered.

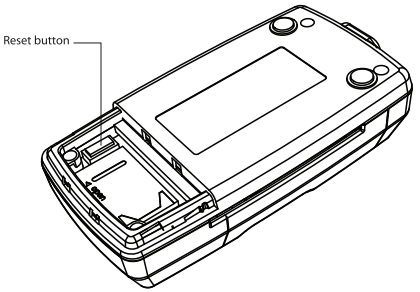

Operating Biometric Card Reader

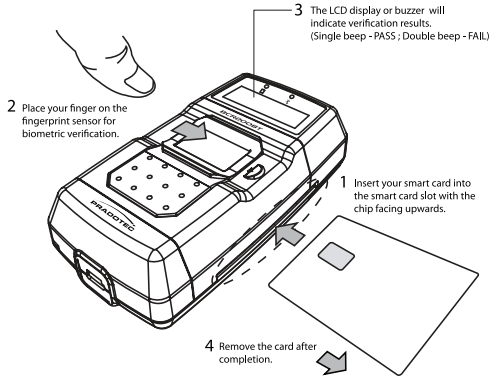

* The steps above are for reference purposes only.

PRADOTEC CORPORATION SDN. BHD.
Email: inquiry@pradotec-global.com
www.pradotec-global.com

P/N : 4100-0049A1R